

N15-2BL

N15-4C

N10-3L

N30H

N10-3L/1866
Only for N10-3L
L=60mm
Standard.

A-5205
Only for N10-3L
L=100mm
Optional.

A-5204
Optional.

A-5206
L=50mm
Optional.

NP15-2B/1866
L=100mm
Standard.



BUREAU VERITAS

Complies with European Standard EN1494

ESSENTIAL!

A-5270
Workshop in-line air filter-regulator-lubricator.
Optional.


A-5271
Air filter on the jack. In case of inadequate air line, fit an air filter to the inlet connector of the jack as a minimum precaution measure to prevent water and dirt from entering. Only for sporadic use. For correct operations, use the in-line air filter-regulator-lubricator unit. Optional.

A wide and varied range. High lift, extra low models etc. A solution for each specific purpose.

LCS lowering control system. "Dead man's" principle operation. Safety overload valve. Hydraulic stroke limitation.



Hand lever locks in four different positions: horizontal, 45°, vertical or collapsed for easier transport.

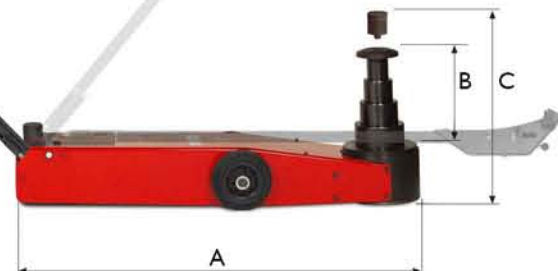






Air hydraulic garage jacks



Rotating or retractable handle depending on models.



Single control switch. Handy and easy to use.



N15-2L

High approach speed and efficient load elevation.

The operator will always be in control of the operation even if the air supply is interrupted.


Self-retracting ram Self-retracting ram descent eliminates manual lowering.

N20-3C

Maximum steel quality. Their chromium molybdenum vanadium composition strengthened by an anti-rust and anti-seizing treatment through liquid nitriding gives the jacks unbeatable resistance and durability properties.

Modular concept. The independent modular construction design-lifting block, valve unit, pump motor, release cylinder and tank -simplifies assembly and makes maintenance easier. (See page10).

Air pressure required:
7-10 bar / 100-145 psi
Necessary air flow:
270 l/min / 9.5 cfm

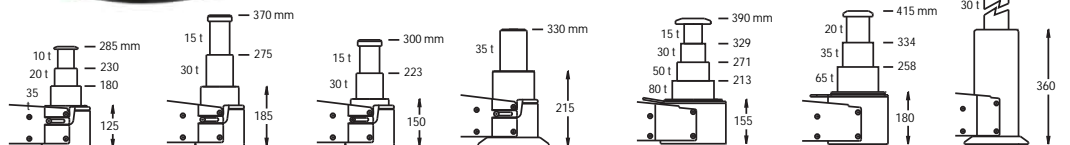

Capacity(t)	10-20-35	15-30	15-30	35	15-30-50-80	20-35-65	30
A	807	807	807	807	810	793	720
B	160	185	150	115	235	235	250
C	345	470	400	430	490	515	710
D	157	157	157	157	212	194	157
E	260	280	280	280	317	317	280
Weight (kg)	41	46,5	43,5	52,5	70,5	69,5	78
References	N10-3L	N15-2L	N15-2BL	N35L	N15-4C	N20-3C	N30HC

